

# CompFi 6 Desktop Version

AC3000 Tri-band Cable-Free WiFi Router 1 Pack

# CompFi 6 Desktop Version

## AC3000 Tri-band Cable-Free WiFi Router 1 Pack

---

### Product Introduction

CompFi 6 Desktop Version is a cable-free WiFi coverage router designed by IP-COM for corporate offices. With advanced true Mesh technology and innovative built-in antennas design, enterprise users can adjust the quantities of CompFi 6 Desktop Version according to the application area and combined with CompFi 6 Desktop Version to form a distributed Mesh network without a dead zone. CompFi 6 Desktop Version supports router and AP mode, which can not only meet the requirements of complete cable-free networking for small projects, but also realize local cable-free networking for large projects or use high-density three-frequency AP. The device adopts a full gigabit network interface design with maximum support for 3 WAN ports, Integrating private cloud NAS, behavior control, authentication and other functions, the solution guarantees an excellent network experience and also greatly improves working efficiency.



## Product Features

---

- 3000Mbps 11AC Wave 2 WiFi
- 1733Mbps independent Backhaul
- 4\*Gigabit Ethernet Port, Max 3\*WAN
- A capacity of 200 wireless clients with video playing
- Built-in RF optimization and QoS policy
- Support intelligent bandwidth control, fast roaming, seamless roaming
- Support non-standard PoE module power supply
- Support wall mount/desktop installation

## Core Strengths

---

### No field survey, no pre-sale work, no after-sale work

The number of nodes needed for networking in your space is calculated based on the recommended coverage area of a single node. You can install the node wherever the signal is weak.

### Wireless coverage in 2 minutes

With the IP-COM unique cable-free link technology, networking automatically begins right after node powering-on, enabling you to complete a wireless coverage project within 2 minutes.

### Independent networking link, rival to the wired link in performance

With independent high-speed wireless networking link, the access link and networking link are isolated from each other, rivaling gigabit wired network in performance.

### NAS Network Storage

No need to set up complex network configurations, no additional cost, so you can access audio and video content and work files on your device from a secure URL or APP.

### Multi-mode, high belt capacity


It supports two modes of routing and AP. When used as a tri-band AP, it can support up to 200 wireless terminal devices to browse high-definition video or live broadcast at the same time.

### IP-COM IMS app supported, easy management, easy maintenance


With the IP-COM IMS app, cable-free devices can be quickly configured and remotely managed, saving the door-to-door after-sale service. You can maintain devices even at home.

# Application Scenarios

## Cable-Free Router Mode

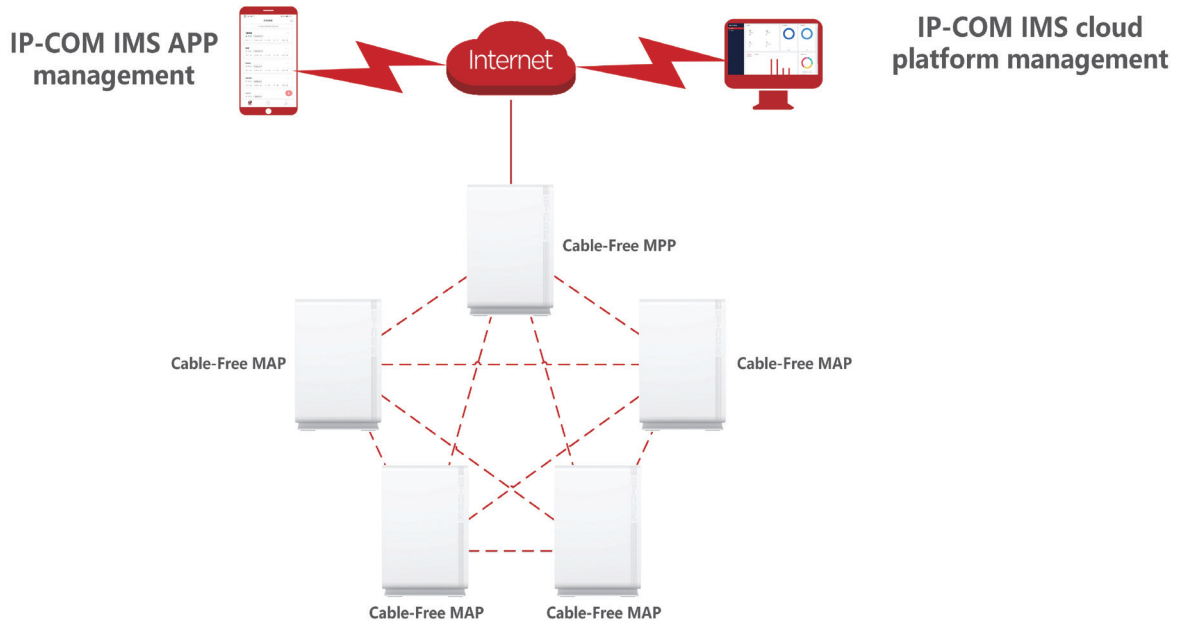

## Cable-Free AP Mode

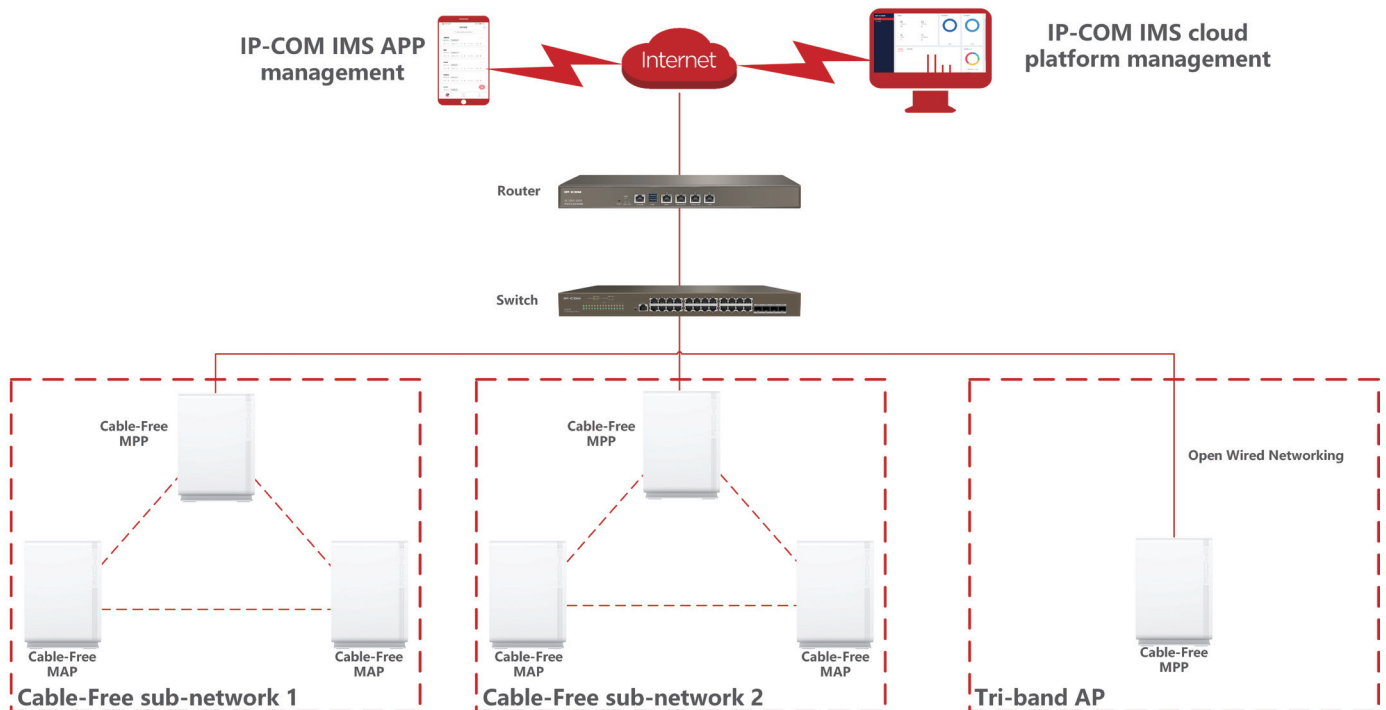

# Specifications

## Hardware Specification

CPU	Quad-core 717Mhz
Memory	256MB
Flash	128MB
Frequency band	Tri-band: 2.4G+5.2G+5.8G
Wireless rate	400+867+1733Mbps
11AC Wave 2	Support
Beamforming	Support
Networking technology	True Mesh
Wireless power	2.4G: 23±1.5dBm (MCS7) 5.2G: 21±1.5dBm (MCS9) 5.8G: 21±1.5dBm (MCS9)
Antenna	8*4dBi, Horizontal omnidirectional antenna
Interface	1*Power Interface 1*Reset Button 1*USB 3.0 4*Gigabit Ethernet Port (1*PoE WAN/LAN, 2*WAN/LAN, 1*LAN)
Enviorment	Working Temperature:0~40°C Storage Temperature:-40~70°C Working Humidity:10%~90%RH Storage Temperature:5%~90%RH

## Software Specification

Operating Mode	Router Mode & AP Mode
WAN Ports	Max 3WAN
USB File Sharing	Support
Port Mirroring	Support
Port Forwarding	Support
UPNP	Support
Security Settings	Support
DDNS	Support
VPN	IPSec/PPTP/L2TP
Filter Management	Support
Guest Network	Support
Static Routing	Support

# Specifications

## Software Specification

Dedicated Backhaul	Support
Bandwidth Control(QoS)	Support
Diagnostic Tool	Support
Fast Roaming	Support

## Installation and Deployment

Mounting	Desk mount/Wall mount
APP Installation and Configuration	Support
Routing mode/Bridge mode	Support
Managed by AC	Support
Maximum hop limit	3 hop
Mesh nodes in one Mesh System	Typical:5 Max:18
Static Routing	Support

## Management and Maintenance

APP/cloud management	Support
APP/cloud Project cluster management	Support
Web local and remote management	Support

## Other

Dimensions	Product: 63*178*253mm (L×W×H) Package: 315*283*93mm (L×W×H)
Package contents	Product host*1、 Wall bracket*1、 PoE injector*1、 Ethernet cable*1、 Power adapter*1、 Bracket screw*2、 Wall-mounting screw、 Plastic anchor*2、 Quick installation guide*1
Qty	5 sets/box
Power Dimensions	External switching power supply48V/0.8A 48V Passive PoE power supply
Certification	CCC/FCC/CE/RoHs

**IP-COM**  
World Wide Wireless

**IP-COM NETWORKS CO.,LTD.**

Tower E3, No.1001, Zhongshanyuan Road,  
Nanshan District, Shenzhen, China. 518052  
Service: [info@ip-com.com.cn](mailto:info@ip-com.com.cn)  
Inquiry: [marketing@ip-com.com.cn](mailto:marketing@ip-com.com.cn)  
Tel: +86-755-27653089